

保險絲座




- 1000V DC-20B.
- 模組開口 45mm
- - 1 模組 (17,5mm) X 極數
- 安裝於35mm Din 導軌
- 抗高溫塑膠
- 提高的絕緣特性

依據

- IEC 60947-1
- IEC 60947-3

尺寸圖

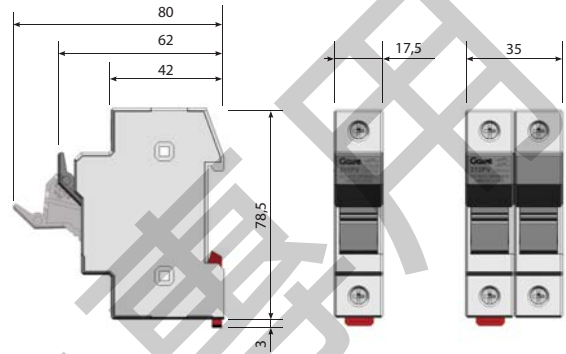

技術性特性

參照	熱額定	保險絲尺寸	極數	模組	包裝
211PV	20 A	10 x 38	1P	1	12
212PV	20 A	10 x 38	2P	2	6

NH Fuse protection




When designing level 2 array junction connection boxes higher currents appear requiring NH knife fuse protection. We can use ultrarapid gR-1000Vdc curve fuses that will protect against overload.

According to standards

- IEC 60269-1
- IEC 60269-6

Dimensions

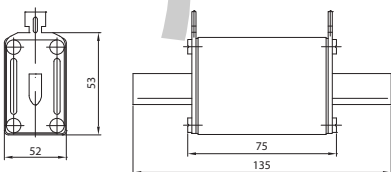

Technical characteristics

Reference	Current rating (A)	Power loss (W)	Package
671PV050	50A	11	3
671PV063	63A	12	3
671PV080	80A	15,5	3
671PV100	100A	16,5	3
671PV125	125A	17,5	3
671PV160	160A	22	3