

CH 10x38 gPV FUSES

General characteristics:

- Product type: cylindrical fuses for panels string protection of photovoltaic plants;
- Dimensions: 10,3 x 38 mm;
- Time-current characteristic: gPV;
- Conform to standards: IEC 60269-1, IEC 60269-6;
- Steatite body;
- Silver contacts;
- Rated current: from 1A to 20A;
- Rated voltage: 1000V DC;
- Breaking capacity: 30kA;
- Minimum packaging: 10 pieces;

Product image 產品圖片




CH 10x38 gPV 保險絲

一般特性:

- 產品類型: 圓柱保險絲, 以作為太陽能電廠之串聯太陽能盤的防護
- 尺寸: 10.3 x 38 mm
- 時間電流特性: gPV
- 符合標準: IEC 60269-1, IEC 60269-6
- 內含滑石
- 銀接點
- 額定電流: 1A到20A
- 額定電壓: DC1000V
- 遮斷容量: 30KA
- 最小包裝: 10個

Drawing 尺寸圖 (dimensions in mm)

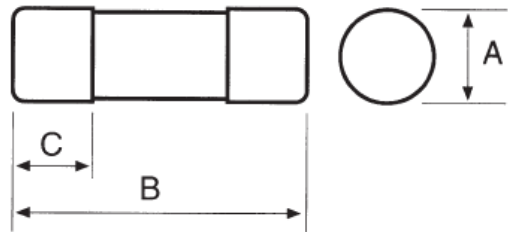


A	10,3
B	38,0
C	10,5

Ordering codes 訂購編碼:

Code	In (A)	Vn (V)	Power dissipation at In (W)
1463001	1	1000V DC	0,76
1463002	2	1000V DC	1,54
1463003	3	1000V DC	1,35
1463004	4	1000V DC	1,84
1463005	5	1000V DC	2,22
1463006	6	1000V DC	2,40
1463008	8	1000V DC	2,55
1463010	10	1000V DC	2,58
1463012	12	1000V DC	2,60
1463015	15	1000V DC	2,44
1463016	16	1000V DC	2,70
1463020	20	1000V DC	2,90

Time / current characteristic curves:
時間/電流特性曲線圖

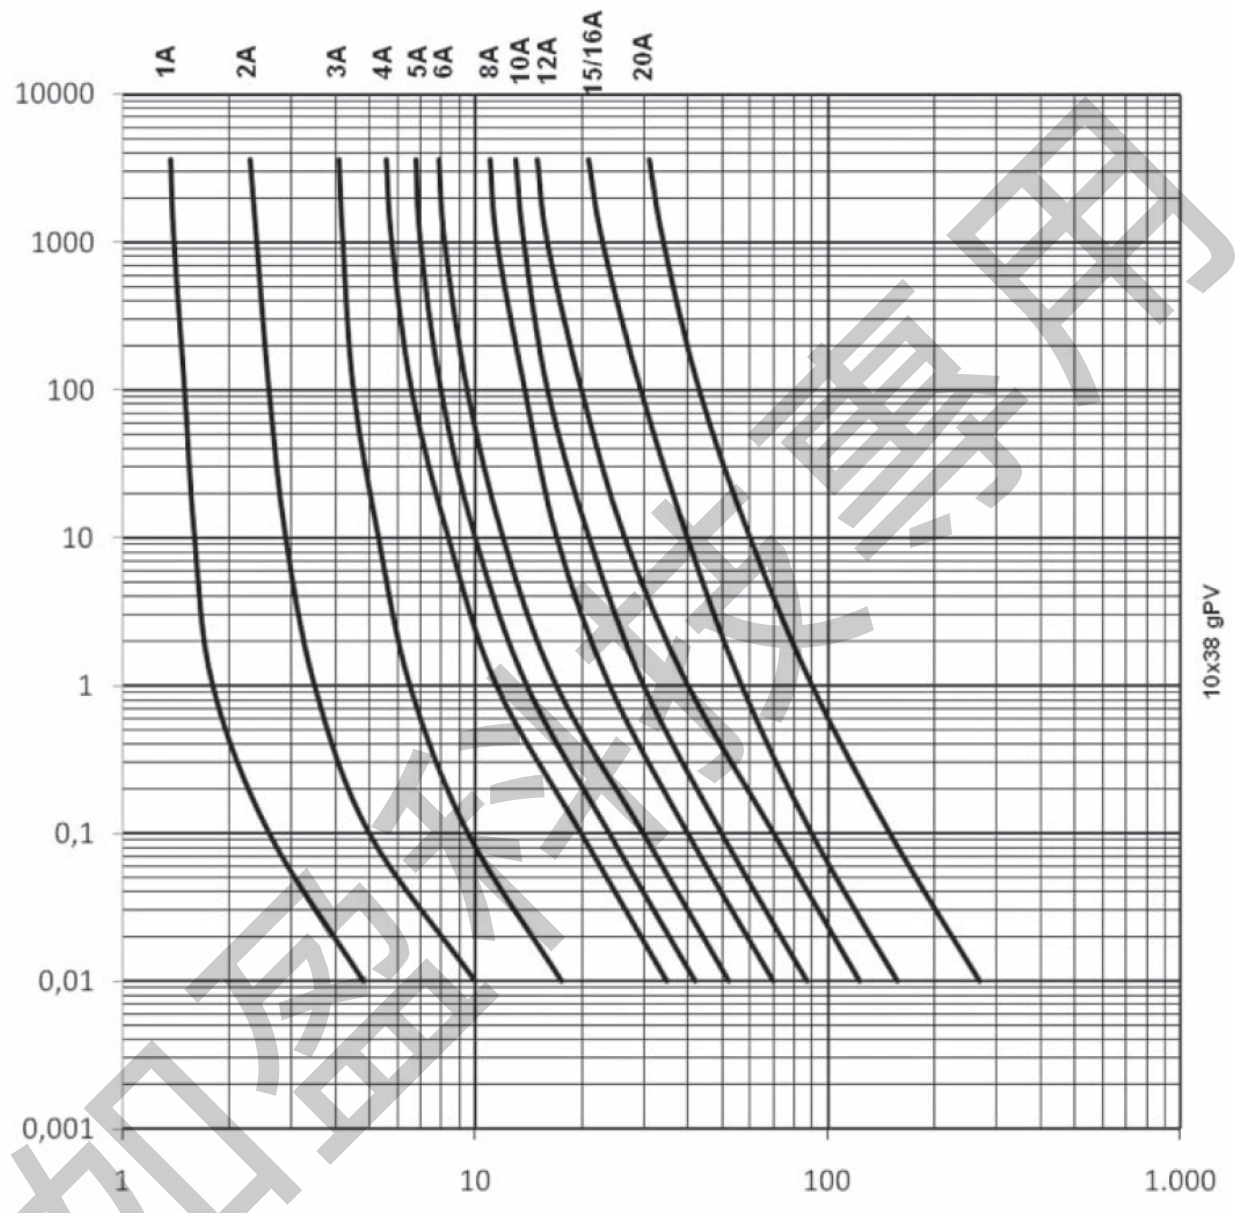

**Rated current derating in function
of ambient temperature:**

溫度衰減-額定電流降低與周圍溫度關係圖

ITALWEBER

t_a (°C)	A_1
40	0,92
45	0,90
50	0,87
55	0,85
60	0,82
65	0,79
70	0,76
75	0,72
80	0,69

